

DP PLASTIC SUBMERSIBLE PUMPS


Main specification

- Liquid temperature up to +40°C.
- Protection IPX8
- Winding copper/ aluminum
- Solids passage up to 5mm(spw 35mm)




DP 250/400/550/900W

Model implication

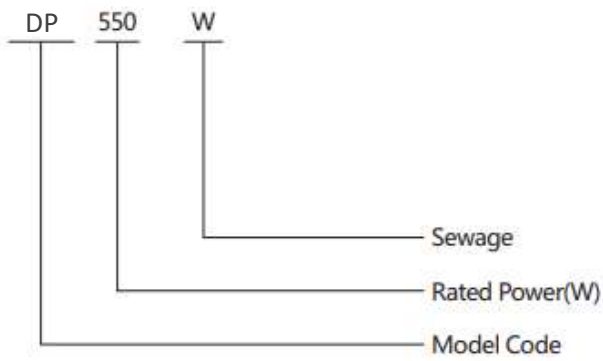

Hydraulic Performance Curve

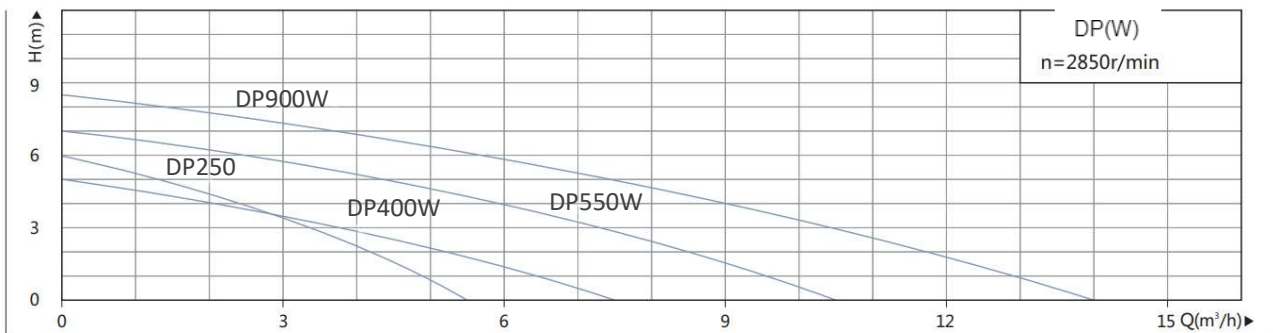

Technical Parameters

Product Number	Model	Power(W)	Max. Flow (m³/h)	Max. Head (m)	Max. Depth (m)	Dim.(mm)	G.W. (kg)
100200002	DP250W	250	5.5	6	5	220x160x370	3.8
100200008	DP400W	400	7.5	5	5		3.8
100200009	DP550W	550	10.5	7	7		4.3
100200011	DP900W	900	14	8.5	7		5.0